


"SZK" 19" Cabinets

DESCRIPTION:

- IP53 protection and mechanical resistance IK10 ratings,
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack - adjustable distance between the front and rear pair from 260 mm to 430 mm, distance between the front of the body and the first pair of racks from 56mm to 174mm.,

Additional equipment:

- Heating set with thermostat,
- Heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherapy ETF 012,
- A set for ventilation of cabinets with a thermostat,
- Floor plate with 3 holes Ø50 for self-breaking,
- 19" 1U 340 mm shelf,
- PS 19" 1U SC SX / DX extendable,
- PS 19" 2U SC DX pull-out,
- 3U voltage distribution panel.

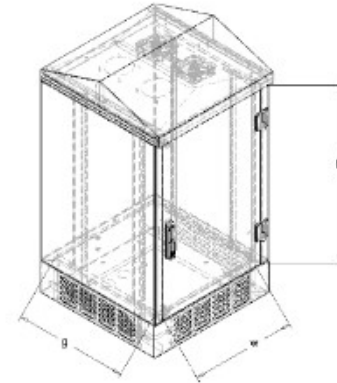

outdoor cabinets

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height	width	depth	height (h)	width (w)	depth (g)
SZK 12U 19"	860	610	610	530	500	570
SZK 18U 19"	1130	610	610	800	500	570
SZK 30U 19"*	1700	610	610	1335	500	570



SZK-18U 19"